

FACILITY FORM 602

N66 24963

(ACCESSION NUMBER)

42

(PAGES)

CR-74787

(NABA OR ORTMA OR AD NUMBER)

(THRU)

(CODE)

(CATEGORY)



GEO PRICE \$

CFSTI PRICE(S) \$

Hard Copy H.C. 2.00


Microfilm M.F. .50

REF ID: A66249

U. S. NAVY
MARINE ENGINEERING LABORATORY
Annapolis, Md.

Dedicated To PROGRESS IN MARINE ENGINEERING

Distribution of this document is unlimited.

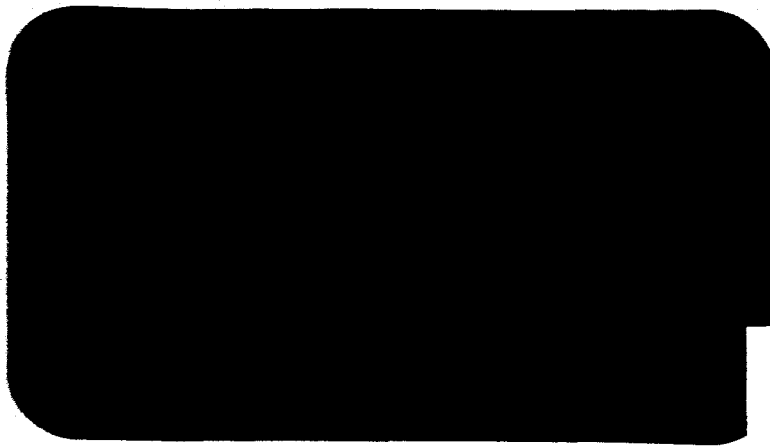

DEDICATED TO PROGRESS IN MARINE ENGINEERING

The Marine Engineering Laboratory is charged with the discovery of fundamental knowledge, the development of new and unique equipment to meet and anticipate new naval requirements, analysis of Fleet machinery failures, and evaluation of prototypes to insure high performance and reliability in the Fleet. Dedicated to progress in naval engineering, the Marine Engineering Laboratory contributes to the technical excellence and superiority of the Navy today - and tomorrow.



ANY MATTERS OF COMMERCIAL CONFIDENCE INCLUDED IN THIS REPORT MUST BE TREATED WITH DUE REGARD FOR THE SAFEGUARDING OF PROPRIETARY INTERESTS.


THE INFORMATION CONTAINED HEREIN SHALL NOT BE USED FOR ADVERTISING PURPOSES.


THIS REPORT HAS BEEN MACHINE ASSEMBLED. IF ANY PAGES ARE MISSING, PLEASE REQUEST FROM MEL.

Shunt Voltage Regulator Circuit
for Nickel-Cadmium Cells with
Auxiliary Electrodes


Assignment 61 501
MEL R&D Report 93/66
April 1966

By
Floyd E. Ford and
Piotr P. M. Liwski


FLOYD E. FORD


PIOTR P. M. LIWSKI

Approved By:


R. J. WYLDE,
Electrical Systems Division

Distribution of this document is unlimited.

Distribution List

BUSHIPS, Code 210L (2)

BUSHIPS, Code 320

BUSHIPS, Code 305

DDC (20)

Addressee (20)

DTMB (2)

NAVBOCTLAB (2)

NAVSEC, Code 660K

NAVSEC, Code 660D

BUWEPS, (RRRE 62)

CO ONR London (2)

NASA

Scientific and Tech. Inf. Fac.

College Park, Md. 20740

Attn: NASA Rep. (3)

NASA

Wash. D. C. 20546

Attn: RNW/E. M. Cohn

NASA

Wash., D.C. 20546

Attn: FC/A. M. Greg Andrus

NASA

Goddard Space Flight Center

Greenbelt, Md. 20771

Attn: Thomas Hennigan, Code 716.2

NASA

Goddard Space Flight Center

Greenbelt, Md. 20771

Attn: Joseph Sherfey, Code 735

NASA

Langley Research Center

Instrument Res. Div.

Hampton, Va. 23365

Attn: John L. Patterson, MS-234

NASA

Langley Res. Cen.

Instrument Res. Div.

Hampton, Va. 23365

Attn: M. B. Seyffert, MS 112

NASA

Lewis Res. Center.

21000 Brookpark Rd.

Cleveland, Ohio 44135

Attn: N. D. Sanders, MS 302-1

NASA

Lewis Research Center

21000 Brookpark Rd.

Cleveland, Ohio 44135

Attn: R. L. Cummings,

MS 500-201

NASA

Lewis Research Center

21000 Brookpark Rd.

Cleveland, Ohio 44135

Attn: R. R. Miller,

MS 5000-202

NASA

Geo. C. Marshall Space

Flight Center

Huntsville, Ala. 35812

Attn: Philip Youngblood

NASA

Geo. C. Marshall Space

Flight Center

Huntsville, Ala. 35812

Attn: Richard Boehme

Bldg. 4487-BB

NASA

Manned Spacecraft Center

Houston, Texas 77058

Attn: William R. Dusenbury

Propulsion & Energy Systems
Branch

Bldg. 16, Site 1

NASA

Manned Spacecraft Center

Houston, Tex. 77058

Attn: Robert Cohen

Gemini Project Office

NASA

Manned Spacecraft Center

Houston, Texas 77058

Attn: Richard Ferguson (EP-5)

NASA

Manned Spacecraft Center

Houston, Texas 77058

Attn: James T. Kennedy (EE-5)

Distribution List (Cont.d)

NASA

Manned Spacecraft Center
Houston, Texas 77058
Attn: Forrest E. Eastman (EE-4)

NASA

Ames Research Center
Pioneer Project
Moffett Field, Calif. 94035
Attn: Jas. R. Swain/A. S. Hertzog

NASA

Ames Research Center
Moffett Field, Calif. 94035
Attn: Jon Rubenzer
Biosatellite Project
Jet Propulsion Laboratory
4800 Oak Grove Drive
Pasadena, Calif. 91103
Attn: Aiji Uchiyama

U. S. Army Engineer R&D Labs.
Ft. Belvoir, Va. 22060
Electrical Power Branch
SMOFB-EP

Commanding Officer

U.S. Army Electronics R&D Labs.
Ft. Monmouth, N. J. 07703
Attn: Power Sources Div.
Code SELRA/PS

Research Office

Rand D. Directorate
Army Weapons Command
Rock Island, Ill. 61201
Attn: Mr. G. Riensmith, Chief

U. S. Army Research Office

Box CM, Duke Station
Durham, No. Carolina 27706
Attn: Dr. Wilhelm Jorgensen

Natick Laboratories

Clothing & Organic Materials Div.
Natick, Mass. 01760
Attn: Robert N. Walsh/G. A. Spano

Harry Diamond Laboratories
Room 300, Building 92
Conn. Ave. & Van Ness St. N.W.
Wash. D. C. 20438

Attn: Nathan Kaplan
Army Material Command
Research Div.

AMCRD-RSCM-T-7

Wash. D. C. 20315

Attn: John W. Crellin

Army Material Command
Development Division
AMCRD-DE-MO-P

Wash. D. C. 20315

Attn: Marshall D. Aiken

U. S. Army TRECOM

Ft. Eustis, Va. 23604

Attn: Dr. R. L. Echols
(SMOFE-PSG)

U. S. Army TRECOM

Ft. Eustis, Va. 23604

Attn: Leonard M. Bartone
(SMOFE-ASE)

U. S. Army Mobility Command
Research Div.

Center Line, Mich. 48090

Attn: O. Renius (AMSMO-RR)

Office of Naval Research

Wash. D. C. 20360

Attn: Head, Power Branch,
Code 429

Office of Naval Research

Dept. of the Navy

Wash. D. C. 20360

Attn: H. W. Fox, Code 425

Naval Research Laboratory

Wash. D. C. 20390

Attn: Dr. J. C. White,
Code 6160

Distribution List (Cont.)

Bureau of Naval Weapons Dept. of the Navy Wash. D. C. 20360 Attn: Whitewall T. Beatson (Code RAAE-52)	Rome Air Development Center, ESD, Griffis AFB, New York 13442 Attn: Frank J. Mollura (RASSM)
Bureau of Naval Weapons Department of the Navy Washington, D.C. 20360 Attn: Milton Knight (Code RAAE-50)	National Bureau of Standards Wash. D. C. 20234 Attn: Dr. W. J. Hamer Office, DDR&E, USE & BSS The Pentagon Wash. D. C. 20310 Attn: G. B. Wareham
Naval Ammunition Depot Crane, Ind. 47522 Attn: E. Bruess/H. Shultz	Mr. Donald B. Hoatson Army Reactors, DRD U. S. Atomic Energy Commission Washington, D.C. 20545
Naval Ordnance Laboratory Department of the Navy Corona, Calif. 91720 Attn: Wm. C. Spindler (Code 441)	Aeroject-General Corp. Chemical Products Div. Azusa, Calif. 91702 Attn: Dr. S. O. Rosenberg
Naval Ordnance Laboratory Department of the Navy Silver Spring, Md. 20900 Attn: Philip B. Cole (Code WB)	Aeronutronic Div. Philco Corp. Ford Road Newport Beach, Calif. 92660
Bureau of Ships Department of the Navy Washington, D. C. 20360 Attn: C. F. Viglotti (Code 660)	Aerospace Corp. P. O. Box 95085 Los Angeles, Calif. 90045 Attn: Library
Bureau of Ships Department of the Navy Washington, D.C. 20360 Attn: Bernard B. Rosenbaum (Code 340)	Allis-Chalmers Mfg. Co. 1100 South 70th St. Milwaukee, Wisc. 53201 Attn: Dr. P. Joyner
Space Systems Div. Los Angeles AF Station Los Angeles, Calif. 90045 Attn: SSSD	American University Mass. & Nebr. Ave., N.W. Wash. D. C. 20016 Attn: Dr. R. T. Foley, Chemistry Dept.
Flight Vehicle Power Branch Aero Propulsion Lab. Wright-Patterson AFB, Ohio 45433 Attn: James E. Cooper	Arthur D. Little, Inc. Acorn Park Cambridge, Mass. 02140 Attn: Dr. Ellery W. Stone
Air Force Cambridge Res. Lab. L. G. Hanscom Field Bedford, Mass. 01731 Attn: Commander (CRO)	

Distribution List (Cont.)

Atomics International Division
 No. American Aviation, Inc.
 8900 De Sota Ave.

Canoga Park, Calif. 91304

Attn: Dr. H. L. Recht

Battelle Memorial Institute

505 King Avenue

Columbus, Ohio, 43201

Attn: Dr. C. L. Faust

Bell Laboratories

Murray Hill, New Jersey 07971

Attn: U. B. Thomas/D. A. Feder

The Boeing Company

P. O. Box 98124

Seattle, Wash. 98124

Borden Chemical Co.

Central Research Lab.

P. O. Box 9524

Philadelphia, Pa. 19124

Burgess Battery Co.

Foot of Exchange St.

Freeport, Ill. 61032

Attn: Dr. Howard J. Strauss

C & D Batteries

Div. of Electric Autolite Co.

Conshohocken, Pa. 19428

Attn: Dr. Eugene Willihnganz

Calvin College

Grand Rapids, Mich. 49506

Attn: Prof. T. P. Dirkse

Catalyst Research Corp.

6101 Falls Road

Baltimore, Md 21209

Attn: J. P. Wooley

ChemCell Inc.

3 Central Avenue

East Newark, N. J. 07029

Attn: Peter D. Richman

Delco Remy Div.

General Motors Corp

2401 Columbus Ave.

Anderson, Ind. 46011

Attn: Dr. J. J. Lander

Douglas Aircraft Company, Inc.

Astropower Lab.

2121 Campus Drive

Newport Beach, Calif. 92663

Attn: Dr. Carl Berger

Dynatech Corp.

17 Tudor St.

Cambridge, Mass 02138

Attn: R. L. Wentworth

Eagle-Picher Co.

P. O. Box 47

Joplin, Mo. 64802

Attn: E. M. Morse

Elgin National Watch Co.

107 National St.

Elgin, Ill., 60120

Attn: T. Boswell

Electric Storage Battery Co.

Missile Battery Div.

2510 Louisburg Rd.

Raleigh, No. Carolina 27604

Attn: A. Chreitzberg

Electric Storage Battery Co.

Carl F. Norberg Research

Center

19 West College Ave.

Yardley, Pa. 19068

Attn: Dr. R. A. Schaefer/

W. S. Herbert

Electrochimics Corp.

1140 O'Brien Dr.

Memlo Park, Calif. 94025

Attn: Dr. Morris Eisenberg

Electro-Optical Systems, Inc.

300 No. Halstead

Pasadena, Calif. 91107

Attn: E. Findl

Distribution List (Cont.)

Emhart Manufacturing Co.

Box 1620

Hartford, Conn. 06101

Attn: Dr. W. P. Cadogan

Engelhard Industries, Inc.

497 DeLancy St.

Newark, N. J. 07105

Attn: Dr. J. G. Cohn

Dr. Arthur Fleischer

466 So. Center St.

Orange, N. J. 07050

General Electric Co.

Schenectady, N. Y., 12301

Attn: Dr. R. C. Osthoff/

Dr. W. Carson

Advanced Tech. Lab.

General Electric Co.

Missile & Space Div.

Spacecraft Dept.

P. O. Box 8555

Phil. Pa. 19101

Attn: E. W. Kipp, Room T-2513

General Electric Co.

Battery Products Section

P. O. Box 114

Gainesville, Fla. 32601

General Electric Co.

Research Lab.

Schenectady, N. Y. 12301

Attn: Dr. H. Liebhafsky

General Motors-Defense Research Labs.

6767 Hollister St.

Santa Barbara, Calif. 93105

Attn: Dr. J. S. Smatko/

Dr. C. R. Russell

Globe-Union, Inc.

900 East Keefe Ave.

Milwaukee, Wisc. 53201

Gould-National Batteries, Ind.

Engineering and Research Center

2630 Univ. Ave., S. E.

Minneapolis, Minn. 55418

Attn: J. F. Donahue

Gulton Industries

Alkaline Battery Div.

212 Durham Ave.

Metuchen, N. J. 08840

Attn: Dr. Robt. Shair

Hughes Aircraft Corp.

Centinda Ave. & Teale St.

Culver City, Calif. 90230

Attn: T. V. Carvey

Hughes Aircraft Corp.

Bldg. 366, M.S. 524

El Segundo, Calif. 90245

Attn: R. B. Robinson

Hughes Research Lab. Corp.

3011 Malibu Canyon Rd.

Malibu, Calif. 90263

ITT Research Institute

10 W. 35th St.

Chicago, Ill. 60616

Attn: Dr. H. T. Francis

Institute for Defense

Analyses

R&E Support Div.

400 Army-Navy Drive

Arl., Va. 22202

Attn: Mr. R. Hamilton/

Dr. Szego

Idaho State University

Dept. of Chemistry

Pocatello, Idaho 83201

Attn: Dr. G. Myron Arcand

Institute of Gas Tech.

State and 34th St.

Chicago, Ill. 60616

Attn: B. S. Baker

Johns Hopkins Univ.

Applied Physics Lab.

8621 Ga. Ave.

Silver Spring, Md. 20910

Attn: Richard Cole

Johns-Manville R&E Center

P.O. Box 159

Manville, N. J. 08835

Attn: J. S. Parkinson

Distribution List (Cont.)

Leesona Moos Lab.

Lake Success Park, Community Dr.

Great Neck, N. Y., 11021

Attn: Dr. H. Oswin

Livingston Electronic Corp.

Rte 309

Montgomeryville, Pa. 18936

Attn: William F. Meyers

Lockheed Missiles & Space Co.

3251 Hanover St.

Palo Alto, Calif. 93404

Attn: Library

Mallory Battery Co.

60 Elm St.

No. Tarryton, N. Y. 10593

Attn: R. R. Clune

P. R. Mallory & Co., Inc.

Northwest Industrial Park

Burlington, Mass. 02103

Attn: Dr. Per Bro

P. B. Mallory & Co., Inc.

3029 E. Wash. St.

Indianapolis, Ind. 46206

Attn: Technical Librarian

Melpar

Tech. Inf. Center

3000 Arlington Blvd.

Falls Church, Va. 22046

Metals and Controls Div.

Texas Instruments, Inc.

34 Forest St.

Attleboro, Mass. 02703

Attn: Dr. E. M. Jost

Midwest Research Institute

425 Volker Boulevard

Kansas City, Mo. 64110

Attn: Dr. B. W. Beadle

Monsanto Research Corp.

Everett, Mass. 02149

Attn: Dr. J. O. Smith

North American Aviation Inc.

Rocketdyne Div.

6633 Canoga Ave.

Canoga Park, Calif. 91303

Attn: Library

North American Aviation, Inc.

12214 Lakewood Boulevard

Downey, Calif. 90241

Attn: Burton M. Otzinger

Dr. John Owen

P. O. Box 87

Bloomfield, N. J. 07003

Power Inf. Center

University of Pa.

Moore School Bldg.

200 So. 33rd St.

Philadelphia, Pa. 19104

Power Sources Div.

Whittaker Corp.

9601 Canoga Ave.

Chatsworth, Calif. 91311

Attn: Dr. M. Shaw

Philco Corp.

Div. of the Ford Motor Co.

Blue Bell, Pa. 19422

Attn: Dr. Phillip Cholet

Radiation Applications, Inc.

36-40 37th St.

Long Island City, N. Y. 11101

RCA

Astro Div.

Hightstown, N. J. 08520

Attn: Seymour Winkler

RCA

P. O. Box 800

Princeton, N. J. 08540

Attn: I. Schulman

RCA

Somerville, N. J. 08873

Attn: Dr. H. S. Lozier

Distribution List (Cont.)

Southwest Research Institute
8500 Culebra Rd.
San Antonio, Texas 78206
Attn: Dr. Jan Al

Sonotone Corp.
Saw Mill River Rd.
Elmsford, N. Y. 10523
Attn: A Mundel

Texas Instruments, Inc.
13500 No. Central Expressway
Dallas, Tex. 75222
Attn: Dr. Isaac Trachtenberg

Thomas A. Edison Research Lab.
McGraw Edison Co.
Watchung Ave.
W. Orange, N. J. 07052
Attn: Dr. P. F. Grieger

TRW Systems, Inc.
One Space Park
Redondo Beach, Calif. 90278
Attn: Dr. A Krausz, Bldg. 60,
Rm. 929

TBW Systems Inc.
One Space Park
Redondo Beach, Calif. 90278
Attn: Dr. Herbert P. Silverman

TBW, Inc.
23555 Euclid Ave.
Cleveland, Ohio 44117
Attn: Librarian

Tyco Laboratories, Inc.
Bear Hill
Hickory Dr.
Waltham, Mass. 02154
Attn: W. W. Burnett

Union Carbide Corp.
Development Lab. Library
P. O. Box 6056
Cleveland, Ohio 44101

University of California
Space Science Lab.
Berkeley, Calif. 94720
Attn: Dr. C. W. Tobias

Union Carbide Corp.
Parma Research Center
P. O. Box 6116
Cleveland, Ohio 44101
Attn: Library

University of Pennsylvania
Electrochemistry Lab.
Philadelphia, Pa. 19104

Western Electric Co.
Suite 802, RCA Bldg.
Wash. D. C. 20006
Attn: R. T. Fiske

Westinghouse Electric Corp.
Research & Development Center
Churchill Borough
Pittsburgh, Pa. 15235

Whittaker Corp.
P. O. Box 337
Newbury Park, Calif. 91320
Attn: Mr. John Rhyne

Whittaker Corp.
3850 Olive St.
Denver, Colo. 80237
Attn: Borch Wendir
Yardney Electric Corp.
40-50 Leonard St.
N. Y., N. Y. 10013
Attn: Dr. Geo. Dalin

ABSTRACT

24963

A circuit to control charge current entering nickel-cadmium cells with auxiliary electrodes ("three-terminal" cells) using a shunt method of control has been developed by MEL for use in satellite power systems requiring minimum weight and space with optimum control and temperature compensation. Reduction in charge current is caused when the set limits of either the total battery terminal voltage, or the potential of an auxiliary electrode of any individual cell, is exceeded.

Author

ADMINISTRATIVE INFORMATION

The work described in this report was sponsored by the Goddard Space Flight Center and accomplished under NASA Contract S 12730-G as amended, (4), 2 October 1964.

REFERENCES

- (a) Interplanetary Monitoring Platform S-74 Technical Data Book, March 1963, Goddard Space Flight Center
- (b) Potter, N. and R. Morrison, "Two Level Voltage Limiter," Goddard Space Flight Center Report X-716-66-7

TABLE OF CONTENTS

	<u>Page</u>
DISTRIBUTION LIST	ii
ABSTRACT	ix
ADMINISTRATIVE INFORMATION	x
REFERENCE	x
INTRODUCTION	1
Background	1
Problem	1
SOLUTION	2
FUNCTIONAL CIRCUIT DESCRIPTION	2
Circuit Operation	2
SUMMARY AND CONCLUSIONS	5
APPENDIXES	
Appendix A - Circuit Description of the Shunt Voltage Regulator for Nickel-Cadmium Cells with Auxiliary Electrodes (4 pages)	
Appendix B - Theory of Diode Detector Operation (4 pages)	
Appendix C - The Combined Shunt Voltage Regulator and Series Charge Current Control Circuit for Three Nickel-Cadmium Cells with Control Electrodes (2 pages)	

SHUNT VOLTAGE REGULATOR CIRCUIT FOR NICKEL- CADMIUM CELLS WITH AUXILIARY ELECTRODES

1.0 INTRODUCTION

The National Aeronautics and Space Administration, Goddard Space Flight Center, (GSFC), having requirements for miniaturized electronic equipment, contracted with MEL to develop charge control circuits for satellite battery power systems. A shunt voltage regulator circuit is described in references (a) and (b). This circuit was used as a base to develop a shunt voltage regulator for use with nickel-cadmium cells containing an auxiliary electrode.

1.1 Background. Charging a nickel-cadmium cell to a nominal 100 percent of its rated capacity and then holding it in this condition without overcharging is a critical problem. The easily measured terminal voltage of the cell cannot be used as an indicating signal for control purposes, since it is relatively flat in the region of 100 percent recharge. The voltage characteristic does not change materially when the cell goes into overcharge and will remain at approximately 1.45 volts for a moderate charge rate at 25 C,* even though gassing may be taking place within the cell proper. Without a method for determining the stage of gas generation the cells could easily be undercharged, with resultant reduced capacity, or overcharged, with resultant excessive gas generation and therefore possible destruction of the battery. The inconsistency in recharging a battery of nickel-cadmium cells is obviously a critical disadvantage in satellite applications.

1.2 Problem. Nickel-cadmium cells have been developed with an auxiliary electrode whose potential, with respect to the cadmium electrode, is controlled by the gas condition within the cell. When a nickel-cadmium cell is charged, no gas is generated until approximately 80 percent recharge has been obtained. The potential of the auxiliary electrode is low during this period. As the cell approaches 100 percent recharge, the gas generation within the cell increases rapidly, and this causes a corresponding increasing potential on the auxiliary electrode.

*Abbreviations used in this text are from the GPO Style Manual, 1959, unless otherwise noted.

2.0 SOLUTION.

The shunt voltage regulator for nickel-cadmium cells described here utilizes the auxiliary electrode potential from each cell in a battery to determine automatically when a cell has obtained 100 percent recharge. It is designed to monitor continually the auxiliary electrode potential of each cell in a battery being charged and allows optimum recharging of the battery under given conditions. As the auxiliary electrode potential of any one cell rises above a preselected value, the control circuit will reduce the charge current to the battery to a predetermined trickle charge level by "clamping" the system terminal voltage at its lower level. In addition, should the battery terminal voltage reach a maximum set level before an auxiliary electrode voltage increases, the control circuit will "clamp" the system terminal voltage to an upper voltage level. All excess available charging current will be shunted around the battery.

A block diagram of this control circuit appears in Figure 1, with a complete component diagram, Figure 1-A of Appendix A. Appendix B gives a detailed explanation of the voltage detector used in this device. A laboratory model, which combines this shunt voltage regulator circuit and an improved version of a series charge current control circuit (MEL Report 25/65 of April 65), is described in Appendix C and shown in block diagram form in Figure 1-C and schematically in Figure 2-C.

3.0 FUNCTIONAL CIRCUIT DESCRIPTION

3.1 Circuit Operation. The shunt voltage regulator circuit for nickel-cadmium cells with auxiliary electrodes is shown in block diagram form in Figure 1. The unmodified shunt voltage regulator used as a basis for this circuit is described in the Data Book, reference (a), and its use as a two-level voltage limiter as used in this circuit is explained in reference (b). The main difference between this shunt regulator and the one in reference (b) is that the lower battery terminal "clamp" voltage is controlled by the output from the auxiliary electrode detectors rather than by a current detector.

3.1.1 The shunt regulator for cells with auxiliary electrodes consists of four subcircuits: a detector section (one for each cell), a square-wave generator, a control circuit, and a current-dump section.

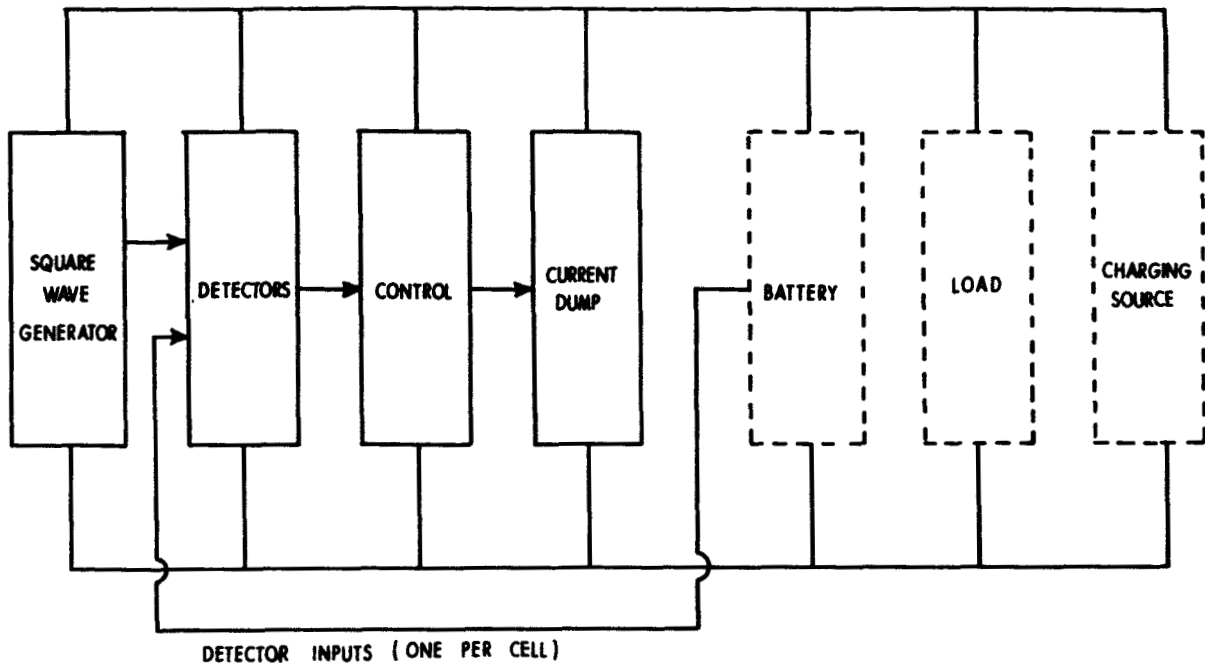


Figure 1

Shunt Regulator for Cells with Auxiliary Electrodes

- Each detector monitors the auxiliary electrode potential of its cell and translates this to a direct-current voltage level.
- The square-wave generator provides the drive signal necessary for detection operation.
- The control circuit amplifies the output of the detector section to control the current-dump circuit.
- The current-dump circuit acts as a voltage-controlled impedance to "clamp" the voltage of the battery at a level determined by the control circuit.

3.1.2 The purpose of this shunt regulator for cells with auxiliary electrodes is to allow a battery to receive maximum current until gas generation within a cell of the battery produces a voltage level on the auxiliary electrode that causes the shunt regulator to voltage-limit the battery. As the

cells in the battery approach 100 percent recharge, gas is generated, producing a rising auxiliary electrode potential. The first cell's auxiliary electrode to reach the preset "control initiation" value will cause the current-dump circuit to begin to shunt current around the battery. As the cells' auxiliary electrode potential continues to increase, the current-dump circuit shunts an increasing amount of current to ground thus decreasing the charging current into the battery (assuming the charging source is current limited). That is to say, the effective impedance of the shunt regulator has been decreased thus allowing an increased current flow through it. This action continues until any cell's auxiliary electrode reach the "final" value, at which point the current-dump circuit is shunting virtually all available current from the charging supply to ground. That is, the effective impedance has been lowered to a point such that the terminal voltage of the shunt regulator has been lowered to a point such that the terminal voltage of the shunt regulator has been clamped at the proper value, this voltage being determined by the number of cells in the battery and the ambient temperature. The battery will then float on the regulator and receive just enough current to maintain its terminal voltage at this lower clamped value.

Should the battery terminal voltage reach a predetermined maximum value before auxiliary electrode potential reaches the control value, the shunt regulator will clamp at this upper maximum value. Afterward, if a third-terminal potential rises beyond the control value, the system terminal voltage will be reduced and clamped in the lower clamped terminal voltage condition.

The upper clamped terminal voltage is adjusted for the number of cells in the battery and is automatically compensated for variations in battery voltage with temperature changes.

A graph of the upper and lower terminal voltage clamped states with respect to temperature, for a battery of 11 cells, appears as Figure 2.

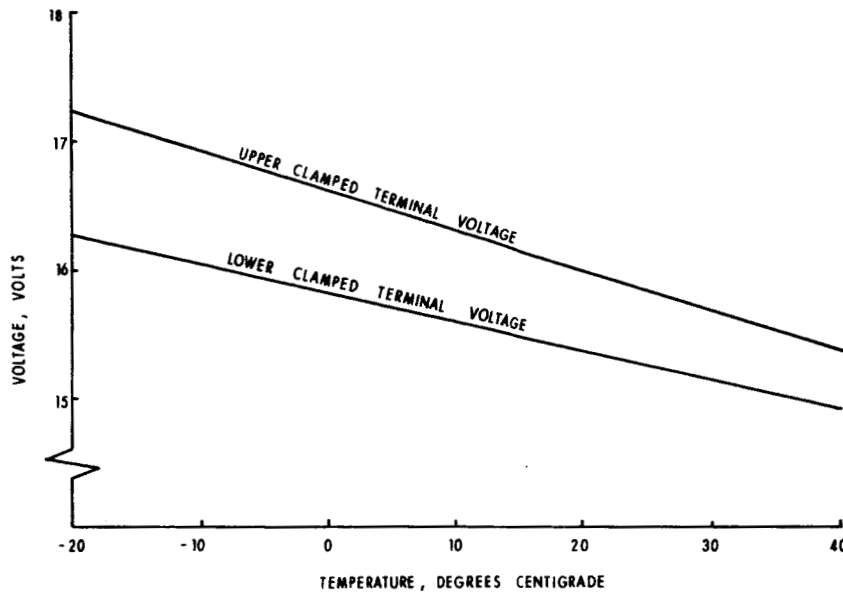


Figure 2

Temperature Characteristics of Shunt Voltage Regulator

4.0 SUMMARY AND CONCLUSIONS

A shunt voltage regulator for nickel-cadmium cells has been developed that fully meets the original design objectives. The circuit has been temperature compensated to yield the desired terminal voltage characteristic over the range of -20 to +40 C. Because of this compensation, the circuit's terminal voltage will conform to the terminal voltage characteristics of nickel-cadmium cells over this temperature range, as shown in Figure 2. Compensation for temperature-caused changes in auxiliary electrode potential can be added to the detector circuit if it is found to be necessary.

At the request of NASA, instead of a prototype of this circuit alone, one of this circuit integrated with an improved form of the series charge current control circuit (MEL 25/65 of April 1965) was built and delivered. This device is described in Appendix C.

Appendix A

Circuit Description of the Shunt Voltage Regulator
for Nickel-Cadmium Cells with Auxiliary Electrodes

References in this appendix are to Figure 1-A which illustrates the stage-by-stage operation. The appendix is a narrative description of the circuit proper and adjustments in the main portions of the shunt voltage regulator for nickel-cadmium cells with auxiliary electrodes. Finally, a parts list is provided.

The square-wave generator is a standard astable multivibrator followed by an emitter-follower stage. It consists of Resistors R_1 through R_4 , Capacitors C_3 and C_4 , and Transistors Q_1 , Q_2 , and Q_{22} . It provides approximately a 500-cycle, 5.5-volt positive square wave to the detectors as a sampling signal. The combination of R_5 and Diodes D_3 and D_7 provide a nearly constant bias voltage for the square wave generator.

Each detector consists of Q_4 , D_4 through D_6 , R_6 through R_8 , R_{41} , C_2 , and Transformer T_1 . If a cell is in a discharged condition, its auxiliary electrode potential is virtually zero; thus, virtually no direct current flows through D_6 , R_8 and the direct-current side of T_1 . For the square-wave sampling signal in the alternating-current side of T_1 , this path appears as a high reflected impedance. Therefore, the energy of the square wave is stored in C_2 , since the path through D_5 , C_2 is a lower impedance. This allows C_2 to maintain a direct-current voltage level sufficient to bias Q_4 in a near saturation state. As the nickel-cadmium approaches 100 percent recharge, its auxiliary electrode potential increases, thus allowing a low direct-current to flow through D_6 , R_8 , and the direct-current side of T_1 . As this current increases (with an increasing auxiliary electrode potential), the dynamic impedance of Diode D_6 decreases, thus lowering its reflected impedance as seen by the square wave. As this impedance decreases, more energy is dissipated through T_1 , and less is stored in C_2 . This will lower the direct-current voltage maintained by C_2 and will cause Q_4 to travel through its active region toward cutoff. When Q_4 is near saturation, its collector voltage is held at less than 1 volt; but as it moves through the active region toward cutoff, its collector voltage increases from less than a volt toward a maximum voltage nearly equal to the bias voltage. With Diodes D_4 of all detectors connected at this cathodes, they act as an "OR" circuit, meaning that the highest anode voltage is that which appears at the cathode connection of the diodes. Therefore, the detector with the highest output voltage will be the controlling signal.

The control section consists of Q_3 , Q_5 through Q_9 , C_1 , C_5 , R_9 through R_{22} , R_{42} , D_{11} , D_2 , and TC_1 through TC_4 . This section of the circuit performs two functions.

The first function is to act as the sensing and amplifying portion (i.e., the feedback loop) of a shunt voltage regulator. To perform this function, voltage divider R_{15} , R_{16} , TC_4 monitors the system terminal voltage and applies a portion of it to the base of Q_6 . The differential amplifier, Q_6 , Q_7 , compares this voltage to a standard, maintained by D_1 , D_2 , and R_{20} . If the system terminal voltage tends to increase beyond its design limit, the output voltage of the differential amplifier will increase (an error signal) causing increased conduction in Q_8 . This, in turn, causes increased conduction in Q_9 by direct application and thus increases the output voltage of the control section. The second function of this section is to amplify the detector output signal, modify it, if necessary, according to the desired temperature characteristic, and apply this signal to the current-dump section. This is accomplished by applying the detector output signal to the gate of Q_3 through R_9 and R_{42} . The field effect transistor (FET) Q_3 is used as a variable impedance across the bottom half of Voltage Divider R_{12} , R_{13} , R_{11} , TC_1 , TC_2 , TC_3 . As the detector output increases, the effective impedance of Q_3 increases, thus allowing a higher voltage at the base of Q_5 causing the conduction of Q_5 to increase. The effect of increased conduction of Q_5 on Q_6 is similar to the effect of an increase of system terminal voltage. Therefore, the subsequent action will be as described above until the output voltage of the control section is increased due to the increase in detector output.

The current-dump section performs as its name implies. A rising control-section output applied directly to the bases of Q_{10} , Q_{11} , Q_{12} , Q_{13} causes these transistors to conduct enough current from the charging supply so that its terminal voltage cannot increase above the desired value. This system was designed with four parallel dumping transistors so that, for space applications, the heat dissipated can be distributed. Resistors R_{23} , R_{24} , R_{25} , R_{26} , are for feedback purposes to cause the dumping transistors to self-balance.

Temperature compensation of the terminal voltage of this circuit is accomplished by the sensistors* TC_1 through TC_4 . From the

*A trade name for a silicon resistor with a temperature coefficient of $+0.7\%/^{\circ}\text{C}$

above explanation it is easily seen how the system terminal voltage clamp (upper voltage clamp), initiated by a rising battery terminal voltage, is temperature compensated by TC_4 . For example if the ambient temperature increases, the resistance value of TC_4 increases, raising the base bias voltage of Q_6 which results in a lowered system terminal voltage as desired. It is also realizable that this will aid the compensation of the system terminal-voltage clamp (lower voltage clamp) initiated by the third-terminal inputs. However, the principal compensating elements for this voltage clamped state are TC_1 , TC_2 , TC_3 . If the system were in this lower clamped state, a rising ambient temperature would increase the resistance values of these sensistors, thus increasing the base bias voltage of Q_5 which will in turn decrease the system terminal voltage. By using various temperature-sensitive elements elsewhere in the two-voltage dividers containing TC_1 through TC_4 , a wide range of system terminal voltage temperature characteristics can be obtained.

A number of adjustments have been provided in this circuit design so that a wide range of operating characteristics can be selected. The shunt voltage regulator as described here was designed to operate with nominally 11 cells. If it is desired to operate with greater than 13 cells, or less than 9 cells, then some minor changes in component values may be necessary besides the addition or subtraction of detectors.

It is obvious from the previous compensation discussion that adjusting Potentiometer R_{15} can alter the level of upper clamped voltage since it controls the base bias voltage of Q_6 . Increasing R_{15} raises the level of the upper clamped voltage. Again, this control will have some effect on the lower clamped voltage. However, the primary level control for the lower clamped voltage is R_{13} which controls the base bias voltage of Q_5 .

Obviously then, when this circuit is calibrated, the upper clamped voltage should be set first before the lower clamped voltage. This can be accomplished by setting R_7 in each detector to approximately 8000 ohms, ascertaining that all detector inputs are below 50 millivolts (or by disconnecting them), setting the charging supply terminal voltage higher than the desired upper clamped voltage, then adjusting R_{15} until the dump circuit conducts enough current to lower the charging supply terminal voltage to the desired upper clamped voltage. (If a laboratory power supply is used as the charging source, its output current should be limited to the maximum value allowable for the cells to be used. i.e., 3 amperes for the design described here). Now raise any

detector input to or above 300 millivolts and adjust R_{13} until the system terminal voltage is reduced to the lower clamped value. This completes the terminal voltage calibration.

Now with one detector input set at the desired "initiation" value, and all others below 50 millivolts, and with R_9 and R_{42} adjusted to zero, adjust R_7 in the detector with the desired input until the system terminal voltage just begins to decrease. Next, raise this detector input to the desired "final" value (this will put the system terminal voltage in the lower clamped state) and increase the value of R_9 and/or R_{42} until the system terminal voltage just begins to increase. This sets the active region of third-electrode input control. Repeat this readjustment of R_7 for each detector using the desired input "initiation" value and the calibration procedure will be complete.

The losses of this voltage regulator circuit itself are nominal. The maximum possible loss which occurs just prior to current-dumping action, is 750 milliwatts.

USN MARINE ENGINEERING LABORATORY

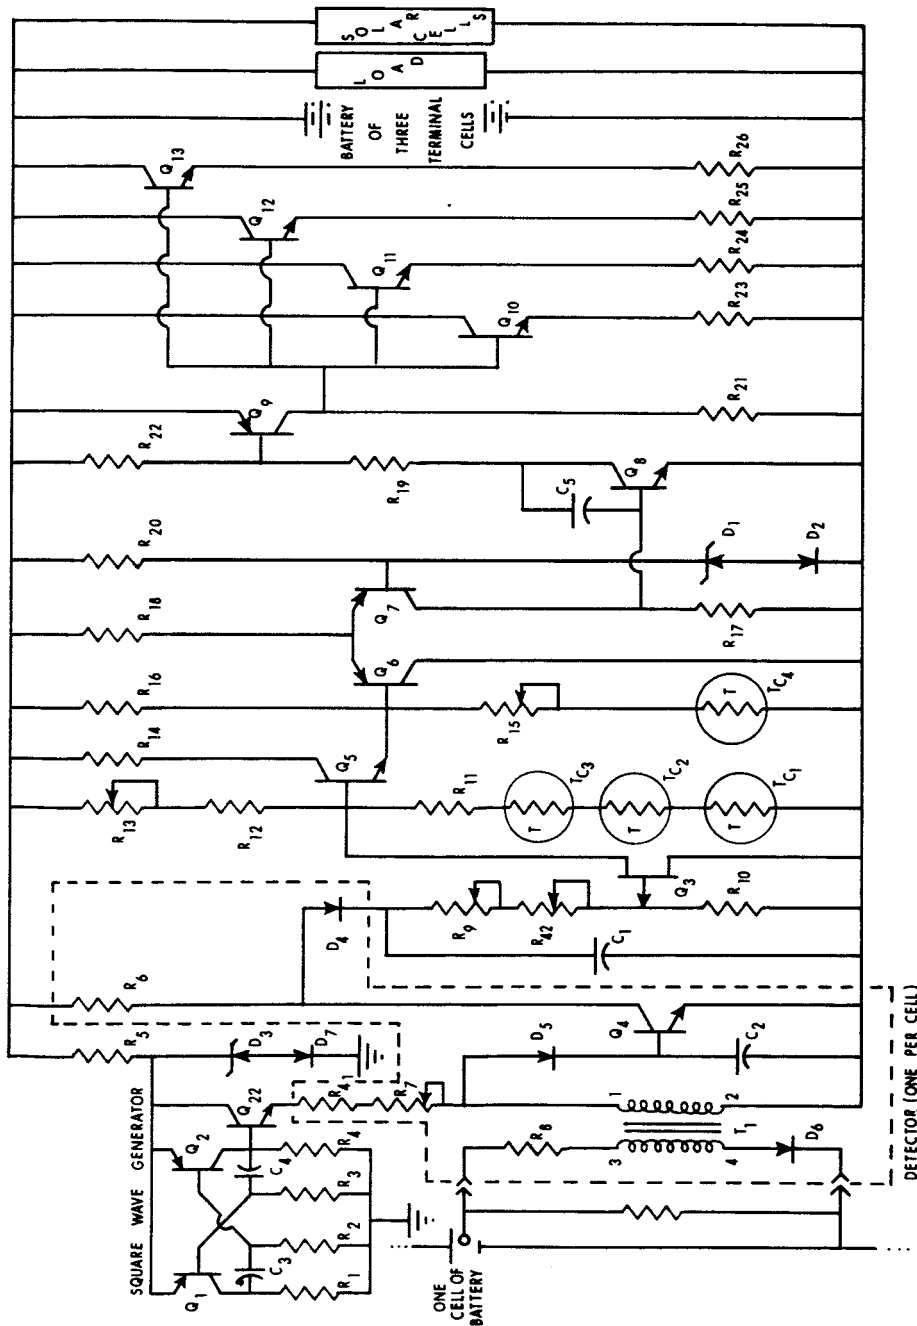


Figure 1-A, Shunt Voltage Regulator Control for Nickel-Cadmium Cells with Control Electrodes

PARTS LIST FOR SHUNT VOLTAGE CIRCUIT

<u>Transistors</u>		Regulator Less expensive Equivalents for Laboratory Instruments	Wakefield Heat Sink No.
Q ₁	2N1303		
Q ₂	2N1303		
Q ₃	2N2841		
Q ₄	2N930	(2N3643)	
Q ₅	2N1613	(2N3564)	
Q ₆	2N2907	(2N3638)	
Q ₇	2N2907	(2N3638)	
Q ₈	2N1482	(2N3568)	
Q ₉	2N2905	(2N3638)	NF-209
Q ₁₀	154-04 Westinghouse or	2N3232	NC-403
Q ₁₁	154-04 Westinghouse or	2N3232	NC-403
Q ₁₂	154-04 Westinghouse or	2N3232	NC-403
Q ₁₃	154-04 Westinghouse or	2N3232	NC-403
Q ₂₂	2N1302		

NOTE: Semiconductors noted in parenthesis are Fairchild Semiconductor Epoxy Packages

<u>Sensistors</u>	
Tc ₁	10K
Tc ₂	10K
Tc ₃	10K
Tc ₄	3.9K

Tc = Sensistors 1/4 watt (Silicon resistors by Texas Instruments)

ResistorsWakefield Heat Sink No.

R ₁	10K		
R ₂	47K		
R ₃	47K		
R ₄	10K		
R ₅	255 ohm		
R ₆	10K		
R ₇	25K Pot.		
R ₈	475 ohm		
R ₉	1 Meg Pot.		
R ₁₀	22 Meg		
R ₁₁	39K		
R ₁₂	31.6K		
R ₁₃	10K Pot.		
R ₁₄	5.1K		
R ₁₅	5K Pot.		
R ₁₆	3.92K		
R ₁₇	5.1K		
R ₁₈	5.1K		
R ₁₉	5.1K		
R ₂₀	10K		
R ₂₁	10K		
R ₂₂	560 ohm		
R ₂₃	10 ohm, 10W	(Dale)	NC 623
R ₂₄	10 ohm, 10W	(Dale)	
R ₂₅	10 ohm, 10W	(Dale)	NC 623
R ₂₆	10 ohm, 10W	(Dale)	
R ₄₁	4.7K		
R ₄₂	1 Meg Pot.		

NOTE: All Resistors 1/2 watt unless noted otherwise. 5% for Laboratory instrument. 1% for space model
 All Potentiometers 25 turns wire wound except R₉ and R₄₂.

Capacitors

C ₁	10 uf
C ₂	10 uf
C ₃	.033 uf
C ₄	.033 uf
C ₅	10 uf

All Capacitors solid tantalum
20%, 35 WVDC unless noted
otherwise.

Diodes

D ₁	1N757 (Zener)
D ₂	1N191
D ₃	1N751 (Zener)
D ₄	1N457
D ₅	1N457
D ₆	1N191
D ₇	1N457

Transformer

T₁ - Sprague Electric Company
R1111

Appendix B

Theory of Diode Detector Operation

The circuit diagram of a detector from the charge-current control circuit for nickel-cadmium cells with control electrodes (three-terminal cells) is shown in Figure 1-B. The basic concept which governs the operation of this detector is shown in the equivalent circuit of the input portion of this detector in Figure 2-B. The variable impedance, R_R , in Figure 2-B is the effective impedance of Diode D_6 and Resistor R_8 reflected to the alternating-current side of the 1 to 1 transformer, T_1 . D_6 and R_8 are connected to the direct-current side of T_1 . The characteristic curve is equal to the inverse of the impedance of this D_6 , R_8 combination. It can be seen from Figure 3-B that, as the voltage across D_6 , R_8 increases, the current through them increases and their effective impedance decreases. Therefore, as the potential on the control electrode (third terminal) increases, the effective impedance of D_6 , R_8 decreases. The impedance of the direct-current side of T_1 remains constant and is small compared to the impedance of D_6 , R_8 , and is therefore ignored. Now it can be seen from Figures 1-B and 2-B that a rising third-terminal potential, causing a reduction in the reflected impedance, R_R , will decrease the power from the square wave generator available to the amplifying portion of the detector, through D_5 and C_2 , by dissipating it in R_R . The square-wave generator and resistor R_7 supply a relatively constant current to the parallel combination of R_R and R_A (the effective impedance of the input to the amplifying portion of the detector) and L , the alternating-current winding of transformer T_1 . Therefore, as R_R decreases, it will decrease the impedance of this parallel combination, and a smaller voltage drop will appear on the base of Q_4 .

Mathematically, this concept is expressed by:

$$R_R = R_8 + R_D$$

$$R_D = \frac{V_D}{I_D}$$

$$I_D = I_R \left(e^{\frac{qV_D}{kT}} - 1 \right) \quad \text{the diode equation}$$

$$R_R = R_8 + \frac{V_D}{I_R \left(e^{\frac{qV_D}{kT}} - 1 \right)}$$

$$V_D + V_{R8} = V$$

where

R_D = effective impedance of Diode D_6

V_D = voltage across D_6

I_D = current through D_6

I_R = saturated value of reverse current through D_6

q = electron charge

k = Boltzmann's constant

T = absolute temperature, K

V_{R8} = voltage across R_p

V = third-terminal potential

It is easily seen that R_R will decrease as V increases, since $e q V_D / kT$ increases at a faster rate than V_D alone as V increases. It is understood that R_R and the combined impedance of D_6 and R_8 are identical, since an impedance can be "reflected" from one side of a transformer to the other with a multiplying factor equal to the transformer turns ratio (in this case, 1 : 1). This proves the inverse dependence of the reflected impedance, R_R , on the control electrode (third-terminal) potential of the cell to which this detector is connected.

Also (from Figure 2-B):

$$I_{R_A} = \frac{V_{R_A}}{R_A}$$

$$V_{R_A} = \left(\frac{X_L \parallel R_R \parallel R_A}{X_L \parallel R_R \parallel R_A + R_7} \right) V_G$$

$$V_G = A [u(t) - u(t-a) + u(t-2a) - \dots]$$

$$X_L \parallel R_R \parallel R_A = \frac{\left(\frac{R_R R_A}{R_R + R_A} \right) X_L}{\frac{R_R R_A}{R_R + R_A} + X_L}$$

$$\therefore V_{R_A} = \frac{\left(\frac{\frac{R_R X_L}{R_R + R_A}}{\frac{R_R R_A}{R_R + R_A} + X_L} \right) A [u(t) - u(t-a) + u(t-2a) - \dots]}{\left(\frac{\frac{R_R R_A X_L}{R_R + R_A}}{\frac{R_R R_A}{R_R + R_A} + X_L} \right) + R_7}$$

where

I_{R_A} = current into R_A

V_{R_A} = voltage across R_A

R_A = effective impedance of the input to the amplifying portion of the detector

X_L = impedance of the alternating-current winding of the transformer, T_1

V_G = output voltage of square wave generator

A = amplitude of V_G

$u(t)$, $u(t-a)$... = time displaced unit step functions

It is evident that as R_R decreases, V_{R_A} and I_{R_A} decrease, thus reducing the voltage (and hence the base current of Q_4) available to the amplifying portion of the detector.

The initial point of the active region (sensitivity) of these detectors can be varied from zero up to several hundred volts by a proper choice of the detector diode, D_6 , and Resistor R_8 . Conventional diodes or stabistors are used for the low voltage range and Zeners can be used for high voltages.

The width of the active region is also affected slightly by the choice of D_6 and R_8 , but in the main is set by the choice of circuitry immediately following the detector outputs. The input impedance and current required from the third terminal will vary accordingly.

Transformer T_1 in each detector provides complete isolation between cells and between each cell and the circuitry which follows it. Also the mode to which all detector outputs are connected constitutes an "OR" circuit which gives both control logic and electrical isolation between individual detector outputs.

USN MARINE ENGINEERING LABORATORY

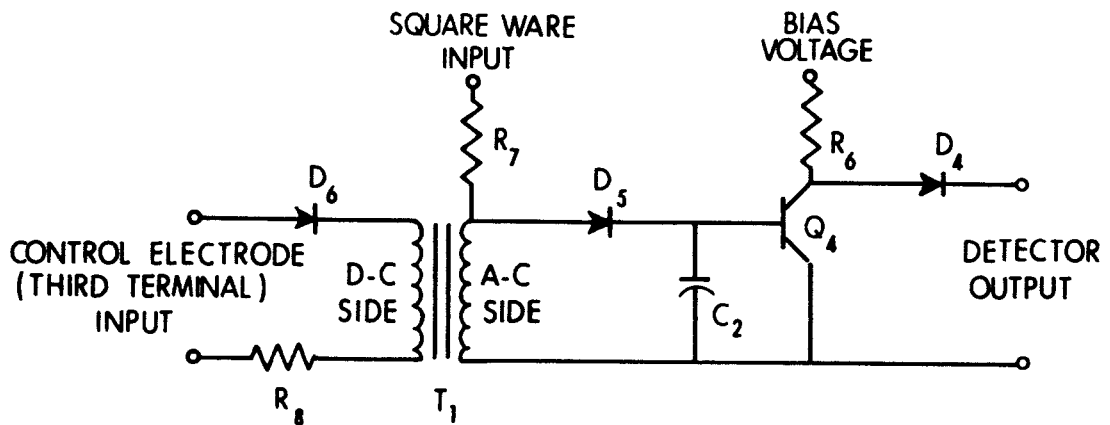


Figure 1-B, Detector

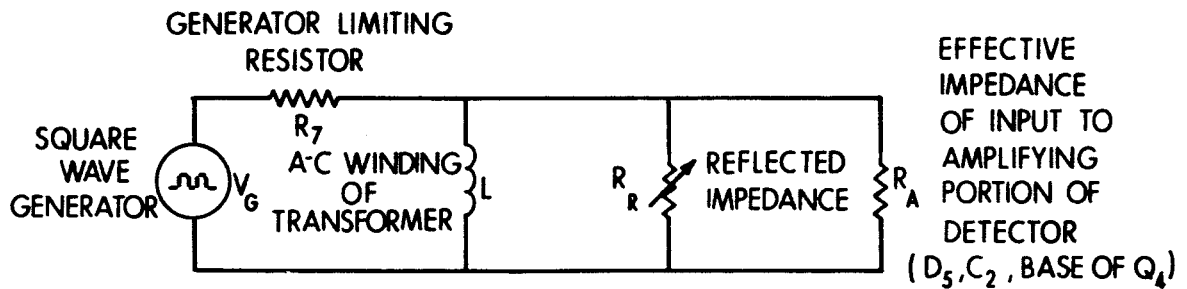


Figure 2-B, Equivalent Circuit of Diode Detector

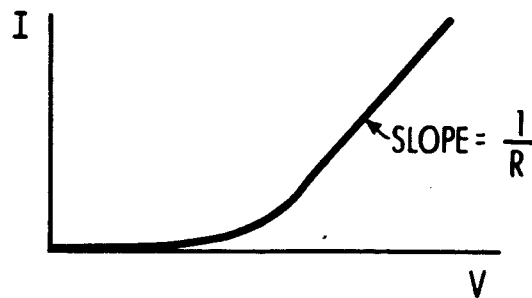


Figure 3-B, Characteristic Curve of D_6, R_8 Combination

Appendix C

The Combined Shunt Voltage Regulator and Series
Charge Current Control Circuit for Three Nickel-Cadmium
Cells with Control Electrodes

The shunt voltage regulator and the series charge current control circuit for auxiliary electrode nickel-cadmium cells integrated into one laboratory instrument are shown in block diagram form in Figure 1-C and schematically in Figure 2-C. This device provides the user with the choice of using either a shunt or series form of current control in a three-terminal cell testing program.

As seen in Figure 1-C, the same square-wave generator and detector sections are used in the two control systems. (The shunt control system used in this instrument is exactly as described above in this report). However, since the entire instrument will not be temperature cycled with the cells under test, the temperature compensating elements are connected at the end of a cable, as noted in Figure 2-C, instead of internally in the circuit. Placing the compensating elements in the temperature chamber along with the cells will insure maintenance of the desired system terminal voltage temperature characteristics. The shunt control system, as shown in Figure 2-C, is selected by throwing switch S, to its "shunt" position and plugging the charging power source into its "shunt" receptacle. As shown, this system is designed to handle a 9-, 10-, or 11-cell battery. Any unused detector inputs are to be left open-circuited.

The series control system shown in Figure 2-C is an improved version of that described in MEL Report 25/65 of May 1965. The most obvious change is that it is now self-powered, no external power supply is needed. The inverter power supply is a two-transformer inverter, filter, and direct-current voltage regulator which transforms power from the charge current supply to a stable bias voltage for the control circuit. The Switches S₃ and S₅ are included to alter the biasing conditions so that the series control system can be used with batteries of 5 cells or batteries of 10 or 11 cells. The input to the control section has been improved to allow a higher fan-in from the detector section. The input impedance of the field effect transistor, Q₁₇, which is in excess of 100 megohms, is used for this purpose. The FET, Q₁₇, operates as a noninverting amplifier which raises the input to Q₁₆ when the detector output increases. An increasing input to Q₁₆ lowers its output, thus lowering the input to Q₁₅ and tending to turn it off. As Q₁₅ is turned off the base drive of the series control element, Q₁₄ is decreased which action, in turn, decreases the charge current.

All other operations of the series control system are as reported in MEL Report 25/65 of May 1965. Operation of the series system is selected by throwing Switch S_1 , to its "series" position, plugging the charging power source into its series receptance, and selecting operation for either a 5-cell battery or a 10- or 11-cell battery by means of Switches S_3 and S_5 .




Figure 2-C, Integrated Charge Current Control Circuits

DOCUMENT CONTROL DATA - R&D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) Navy Marine Engineering Laboratory Annapolis, Maryland		2a. REPORT SECURITY CLASSIFICATION Unclassified	
		2b. GROUP	
3. REPORT TITLE Shunt Voltage Regulator Circuit for Nickel-Cadmium Cells with Auxiliary Electrodes			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates)			
5. AUTHOR(S) (Last name, first name, initial) Liwski, Piotr P. M. and Ford, Floyd E.			
6. REPORT DATE April 1966		7a. TOTAL NO. OF PAGES 22	7b. NO. OF REFS 2
8a. CONTRACT OR GRANT NO.		9a. ORIGINATOR'S REPORT NUMBER(S) 93/66	
b. PROJECT NO. NASA Contract S 12730-G			
c.		9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
d.		61 501	
10. AVAILABILITY/LIMITATION NOTICES Distribution of this document is unlimited.			
11. SUPPLEMENTARY NOTES 3 appendixes		12. SPONSORING MILITARY ACTIVITY NASA	
13. ABSTRACT <p>A circuit to control charge current entering nickel-cadmium cells with auxiliary electrodes ("three-terminal" cells) using a shunt method of control has been developed by MEL for use in satellite power systems requiring minimum weight and space with optimum control and temperature compensation. Reduction in charge current is caused when the set limits of either the total battery terminal voltage, or the potential of any individual cell at this auxiliary electrode, is exceeded.</p> <p>(author)</p>			

14.

KEY WORDS

Change current control
Circuit
Current control
Shunt control
Shunt voltage control
Three terminal cells
Nickel-cadmium cells
Nickel-cadmium cells with auxiliary
electrodes
Satellite electric power systems
Electrochemical cells
Control circuits
Feedback

LINK A

LINK B

LINK C

ROLE

WT

ROLE

WT

ROLE

WT

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year; or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (*paying for*) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.

<p>Navy Marine Engineering Laboratory Report 93/66</p> <p>SHUNT VOLTAGE REGULATOR CIRCUIT FOR NICKEL-CADMIUM CELLS WITH AUXILIARY ELECTRODES by Liwski, Piotr P. M. and Ford, Floyd E, April 1966, 22 pp.</p> <p>UNCLASSIFIED</p>	<p>1. Electric shunts (current regulation) - Alkaline cell</p> <p>2. Current regulators (Electric shunts) Alkaline cell</p> <p>I. Liwski, Piotr P. M.</p> <p>II. Ford, Floyd E</p> <p>III Title</p> <p>UNCLASSIFIED</p>
<p>A circuit to control charge current entering nickel-cadmium cells with auxiliary electrodes ("three-terminal" cells) using a shunt method of control has (over)</p>	<p>1. Electric shunts (current regulation) - Alkaline cell</p> <p>2. Current regulators (Electric shunts) Alkaline cell</p> <p>I. Liwski, Piotr P. M.</p> <p>II. Ford, Floyd E.</p> <p>III. Title</p> <p>UNCLASSIFIED</p>
<p>been developed by MEL for use in satellite power systems requiring minimum weight and space with optimum control and temperature compensation. Reduction in charge current is caused when the set limits of either the total battery terminal voltage, or the potential of any individual cell at this auxiliary electrode, is exceeded.</p>	

<p>avy Marine Engineering Laboratory Report 93/66</p> <p>SHUNT VOLTAGE REGULATOR CIRCUIT FOR NICKEL-CADMIUM CELLS WITH AUXILIARY ELECTRODES by Liwski, Piotr P. M. and Ford, Lloyd E, April 1966, 22 pp.</p> <p>UNCLASSIFIED</p>	<p>1. Electric shunts (current regulation) - Alkaline cell</p> <p>2. Current regulators (Electric shunts) Alkaline cell</p> <p>I. Liwski, Piotr P. M.</p> <p>II. Ford, Floyd E</p> <p>III Title</p> <p>UNCLASSIFIED</p>	<p>Navy Marine Engineering Laboratory Report 93/66</p> <p>SHUNT VOLTAGE REGULATOR CIRCUIT FOR NICKEL-CADMIUM CELLS WITH AUXILIARY ELECTRODES by Liwski, Piotr P. M. and Ford, Floyd E, April 1966, 22 pp.</p> <p>UNCLASSIFIED</p>	<p>1. Electric shunts (current regulation) - Alkaline cell</p> <p>2. Current regulators (Electric shunts) Alkaline cell</p> <p>I. Liwski, Piotr P. M.</p> <p>II. Ford, Floyd E.</p> <p>III. Title</p> <p>UNCLASSIFIED</p>
<p>A circuit to control charge current entering nickel-cadmium cells with auxiliary electrodes "three-terminal" cells) using shunt method of control has (over)</p>	<p>been developed by MEL for use in satellite power systems requiring minimum weight and space with optimum control and temperature compensation. Reduction in charge current is caused when the set limits of either the total battery terminal voltage, or the potential of any individual cell at this auxiliary electrode, is exceeded.</p>	<p>been developed by MEL for use in satellite power systems requiring minimum weight and space with optimum control and temperature compensation. Reduction in charge current is caused when the set limits of either the total battery terminal voltage, or the potential of any individual cell at this auxiliary electrode, is exceeded.</p>	

<p>Navy Marine Engineering Laboratory Report 93/66</p> <p>SHUNT VOLTAGE REGULATOR CIRCUIT FOR NICKEL-CADMNIUM CELLS WITH AUXILIARY ELECTRODES by Liwski, Piotr P. M. and Ford, Floyd E, April 1966, 22 pp.</p> <p>Figs. UNCLASSIFIED</p>	<p>1. Electric shunts (current regulation) - Alkaline cell</p> <p>2. Current regulators (Electric shunts) Alkaline cell</p> <p>I. Liwski, Piotr P. M.</p> <p>II. Ford, Floyd E</p> <p>III Title</p> <p>UNCLASSIFIED</p>
<p>A circuit to control charge current entering nickel-cadmium cells with auxiliary electrodes ("three-terminal" cells) using a shunt method of control has (over)</p>	<p>1. Liwski, Piotr P. M.</p> <p>II. Ford, Floyd E</p> <p>III Title</p> <p>UNCLASSIFIED</p>
<p>been developed by MEL for use in satellite power systems requiring minimum weight and space with optimum control and temperature compensation. Reduction in charge current is caused when the set limits of either the total battery terminal voltage, or the potential of any individual cell at this auxiliary electrode, is exceeded.</p>	<p>been developed by MEL for use in satellite power systems requiring minimum weight and space with optimum control and temperature compensation. Reduction in charge current is caused when the set limits of either the total battery terminal voltage, or the potential of any individual cell at this auxiliary electrode, is exceeded.</p>

avy Marine Engineering Labora- ory Report 93/66 SHUNT VOLTAGE REGULATOR CIR- UIT FOR NICKEL-CADMIUM CELLS ITH AUXILIARY ELECTRODES by iwski, Piotr P. M. and Ford, loyd E, April 1966, 22 pp. igs. UNCLASSIFIED	1. Electric shunts (cur- rent regula- tion) - Alkaline cell 2. Current regu- lators (Elec- tric shunts) Alkaline cell I. Liwski, Piotr P. M. II. Ford, Floyd E III Title UNCLASSIFIED
A circuit to control charge urrent entering nickel-cadmium ells with auxiliary electrodes "three-terminal" cells) using shunt method of control has (over)	Navy Marine Engineering Labora- ory Report 93/66 SHUNT VOLTAGE REGULATOR CIR- UIT FOR NICKEL-CADMIUM CELLS WITH AUXILIARY ELECTRODES by Liwski, Piotr P. M. and Ford, Floyd E, April 1966, 22 pp. Figs. UNCLASSIFIED 1. Electric shunts (cur- rent regula- tion) - Alkaline cell 2. Current regu- lators (Elec- tric shunts) Alkaline cell I. Liwski, Piotr P. M. II. Ford, Floyd E III. Title UNCLASSIFIED
een developed by MEL for use in satellite power ystems requiring minimum weight and space with optimum control and temperature compensation. eduction in charge current is caused when the et limits of either the total battery terminal oltage, or the potential of any individual cell t this auxiliary electrode, is exceeded.	been developed by MEL for use in satellite power ystems requiring minimum weight and space with optimum control and temperature compensation. Reduction in charge current is caused when the set limits of either the total battery terminal voltage, or the potential of any individual cell at this auxiliary electrode, is exceeded.